RURAL MUNICIPALITY OF EAST St. PAUL

2025 Camsell Avenue, East St. Paul, Manitoba R2E 1A7
Telephone (204) 668-8336 Fax (204) 667-8312
E-mail bschmidt@eaststpaul.com

Fax

FILE No. 06-10

To:	Karl Kruger	**From:**	Bruce Schmidt
Fax:	986-7332	**Date:**	March 30, 2006
Phone:	986-6191	**Pages:**	2
Re:	Glenway Avenue Roadway Rehabilitation	**CC:**	J. Mauws, CAO D. Gera, Councilor

FAXED

☐ **Urgent** ☐ **For Review** ☐ **Please Comment** ☐ **Please Reply** ☐ **Please Recycle**

Good afternoon Karl,

This fax is to inform you that the R.M. of East St. Paul has committed $40,000.00 in this year's Public Works Budget to rehabilitate Glenway Ave. We had estimated the total project to cost in the neighborhood of $80,000.00. We are requesting that the City of Winnipeg consider matching this amount so there would be enough funding available to rehabilitate the boundary road, Gelnway Avenue, from Henderson Highway to Raleigh Street.

I have included an estimate I secured from a contractor for budgetary purposes.

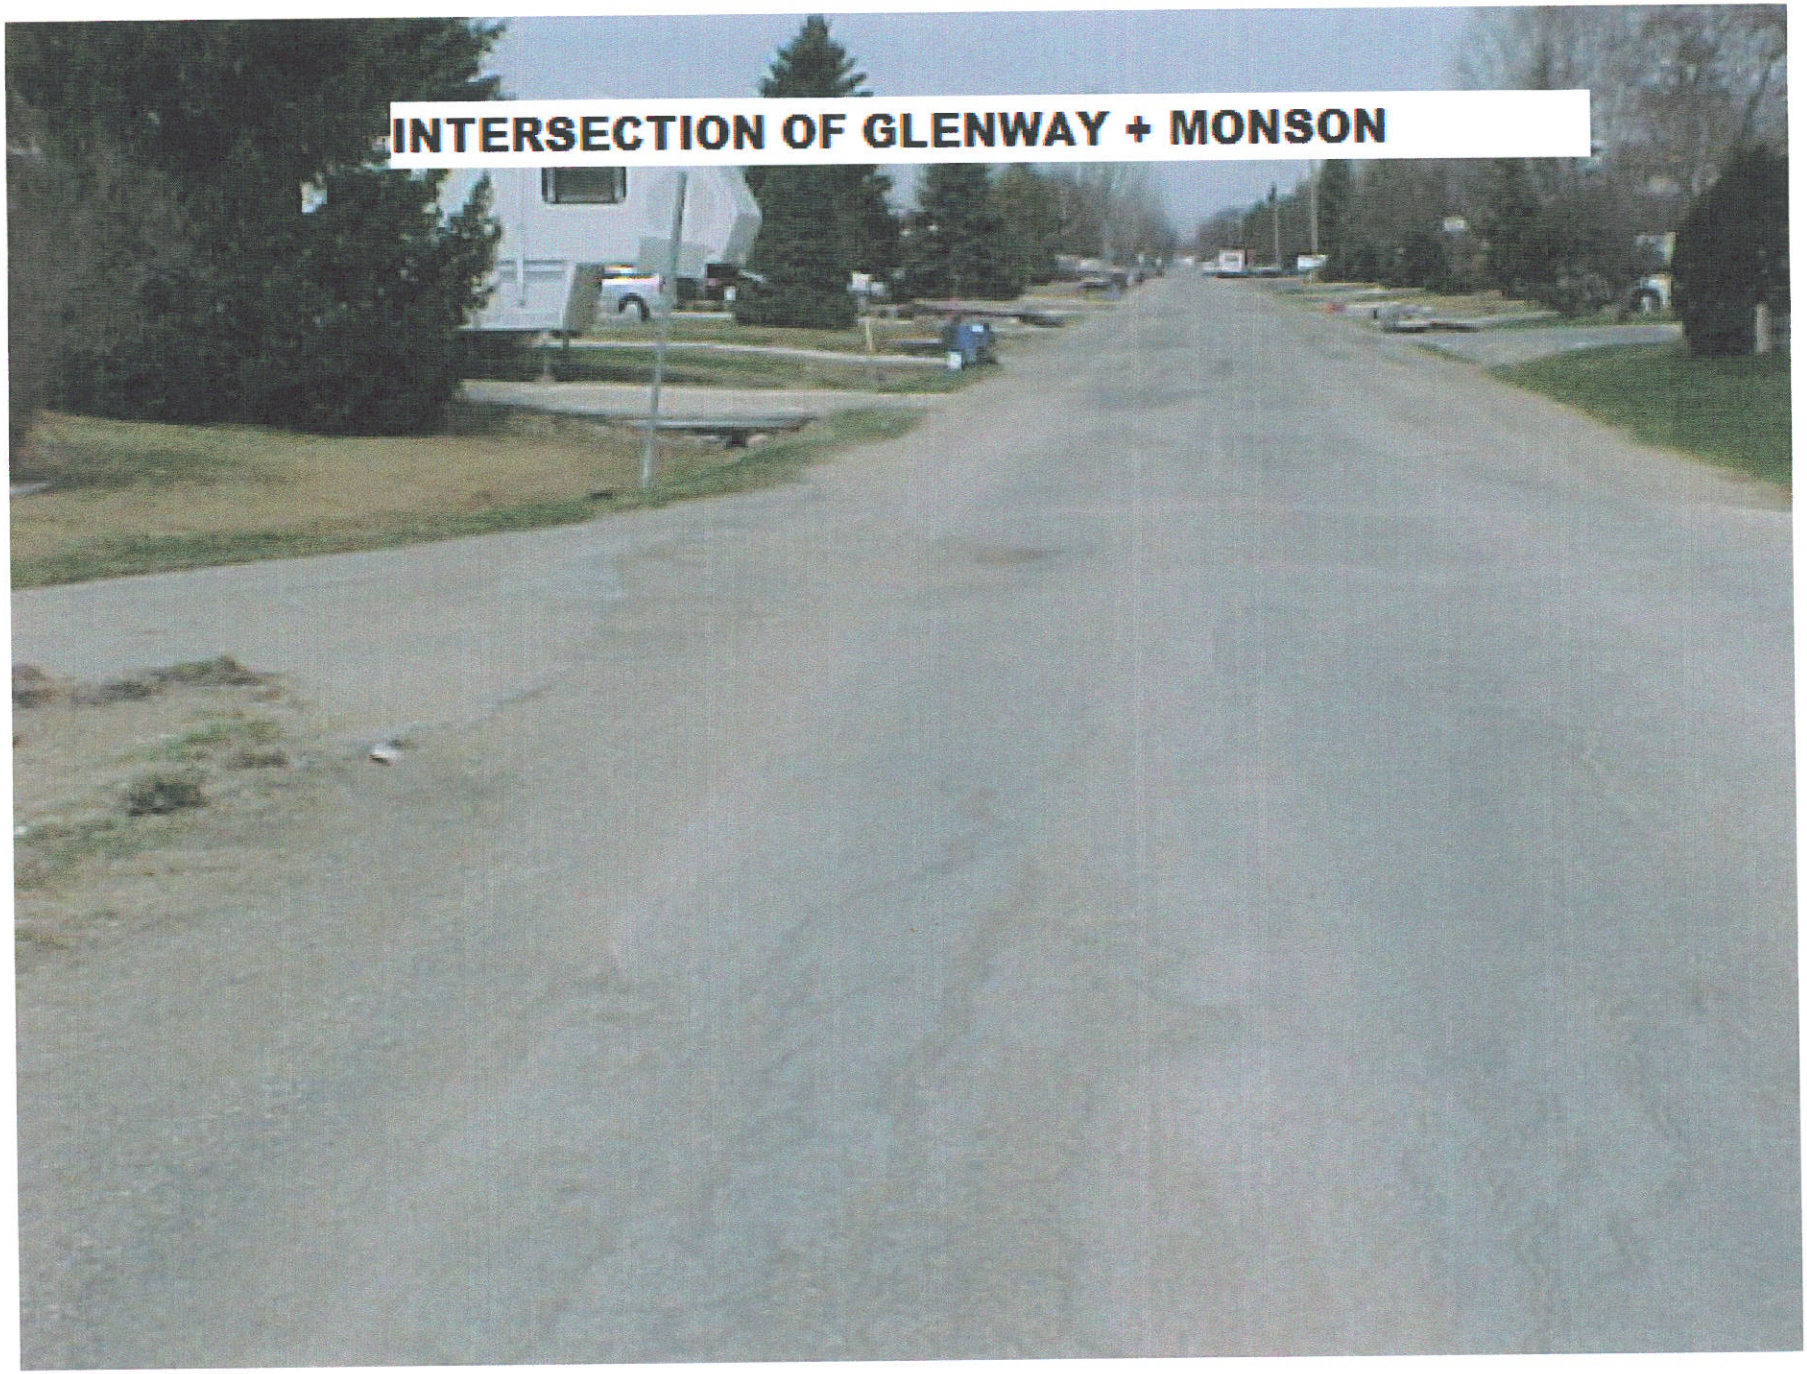
Please call if you have any questions.

Regards,

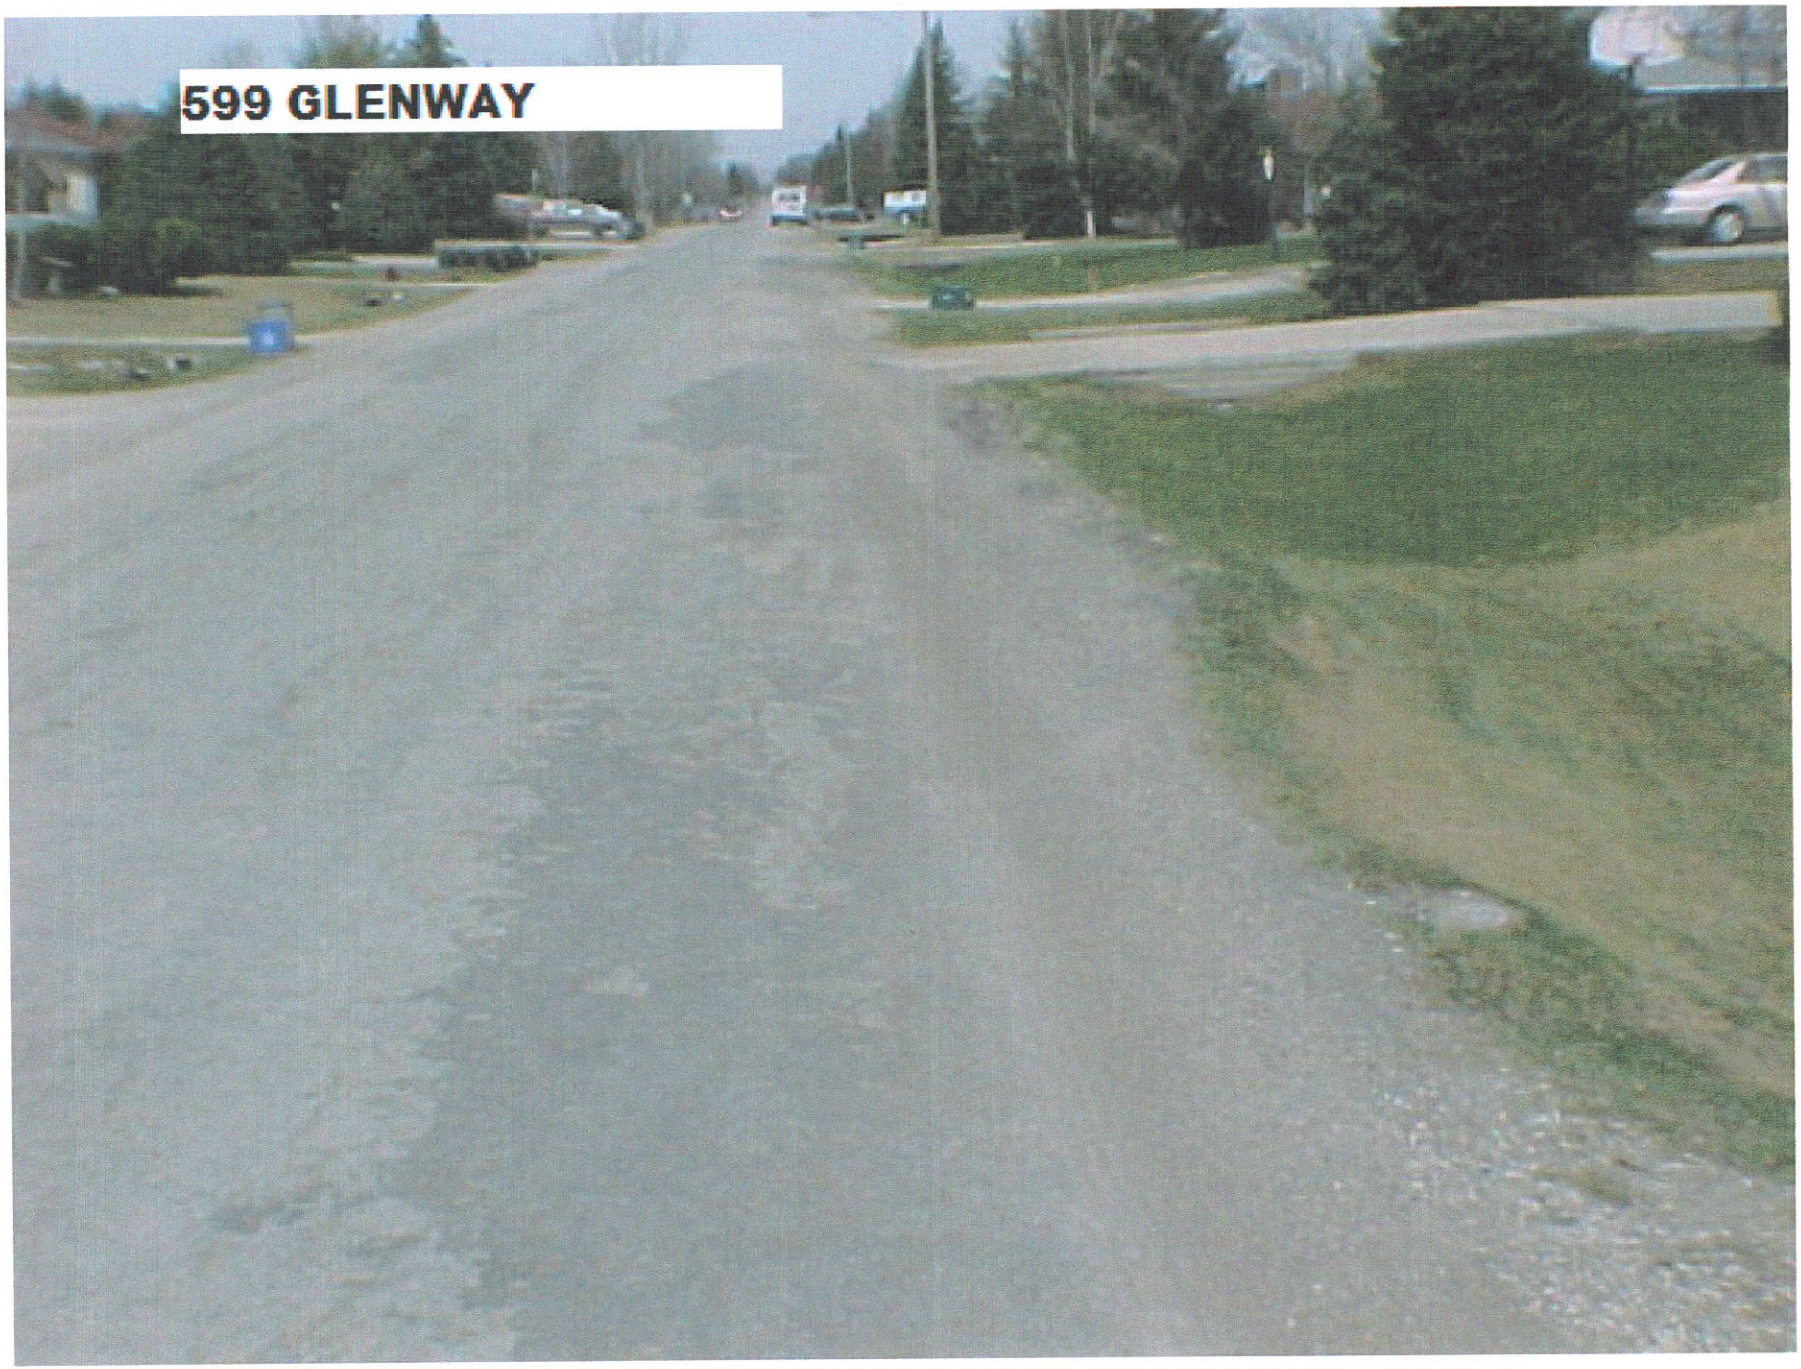
Bruce Schmidt, Public Works Manager

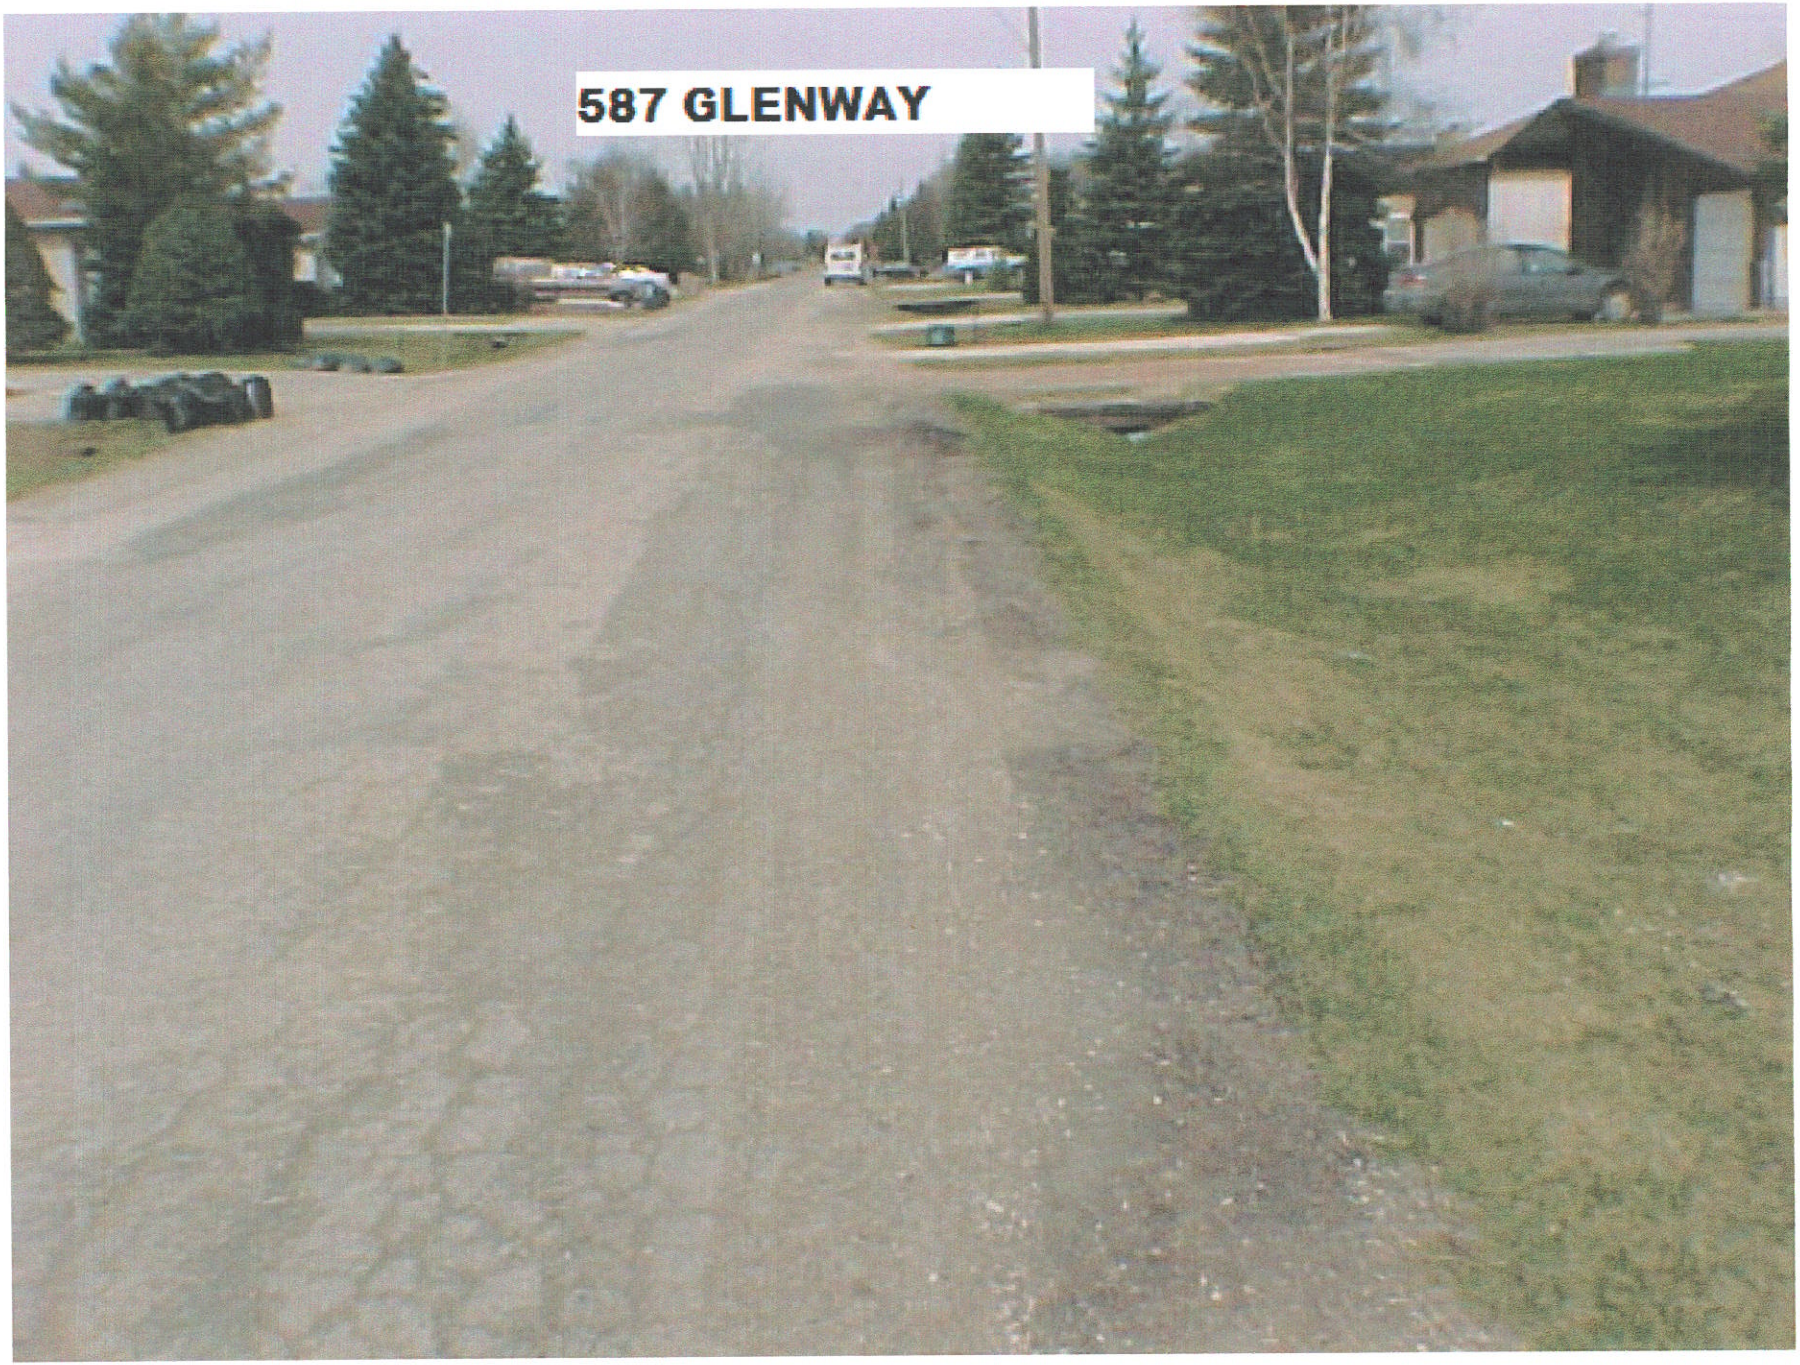
I:\Data\PW Superintendent\Jerome Mauws Folders\Memos to Jerome Mauws 2006\fax to city re glenway 033006.doc

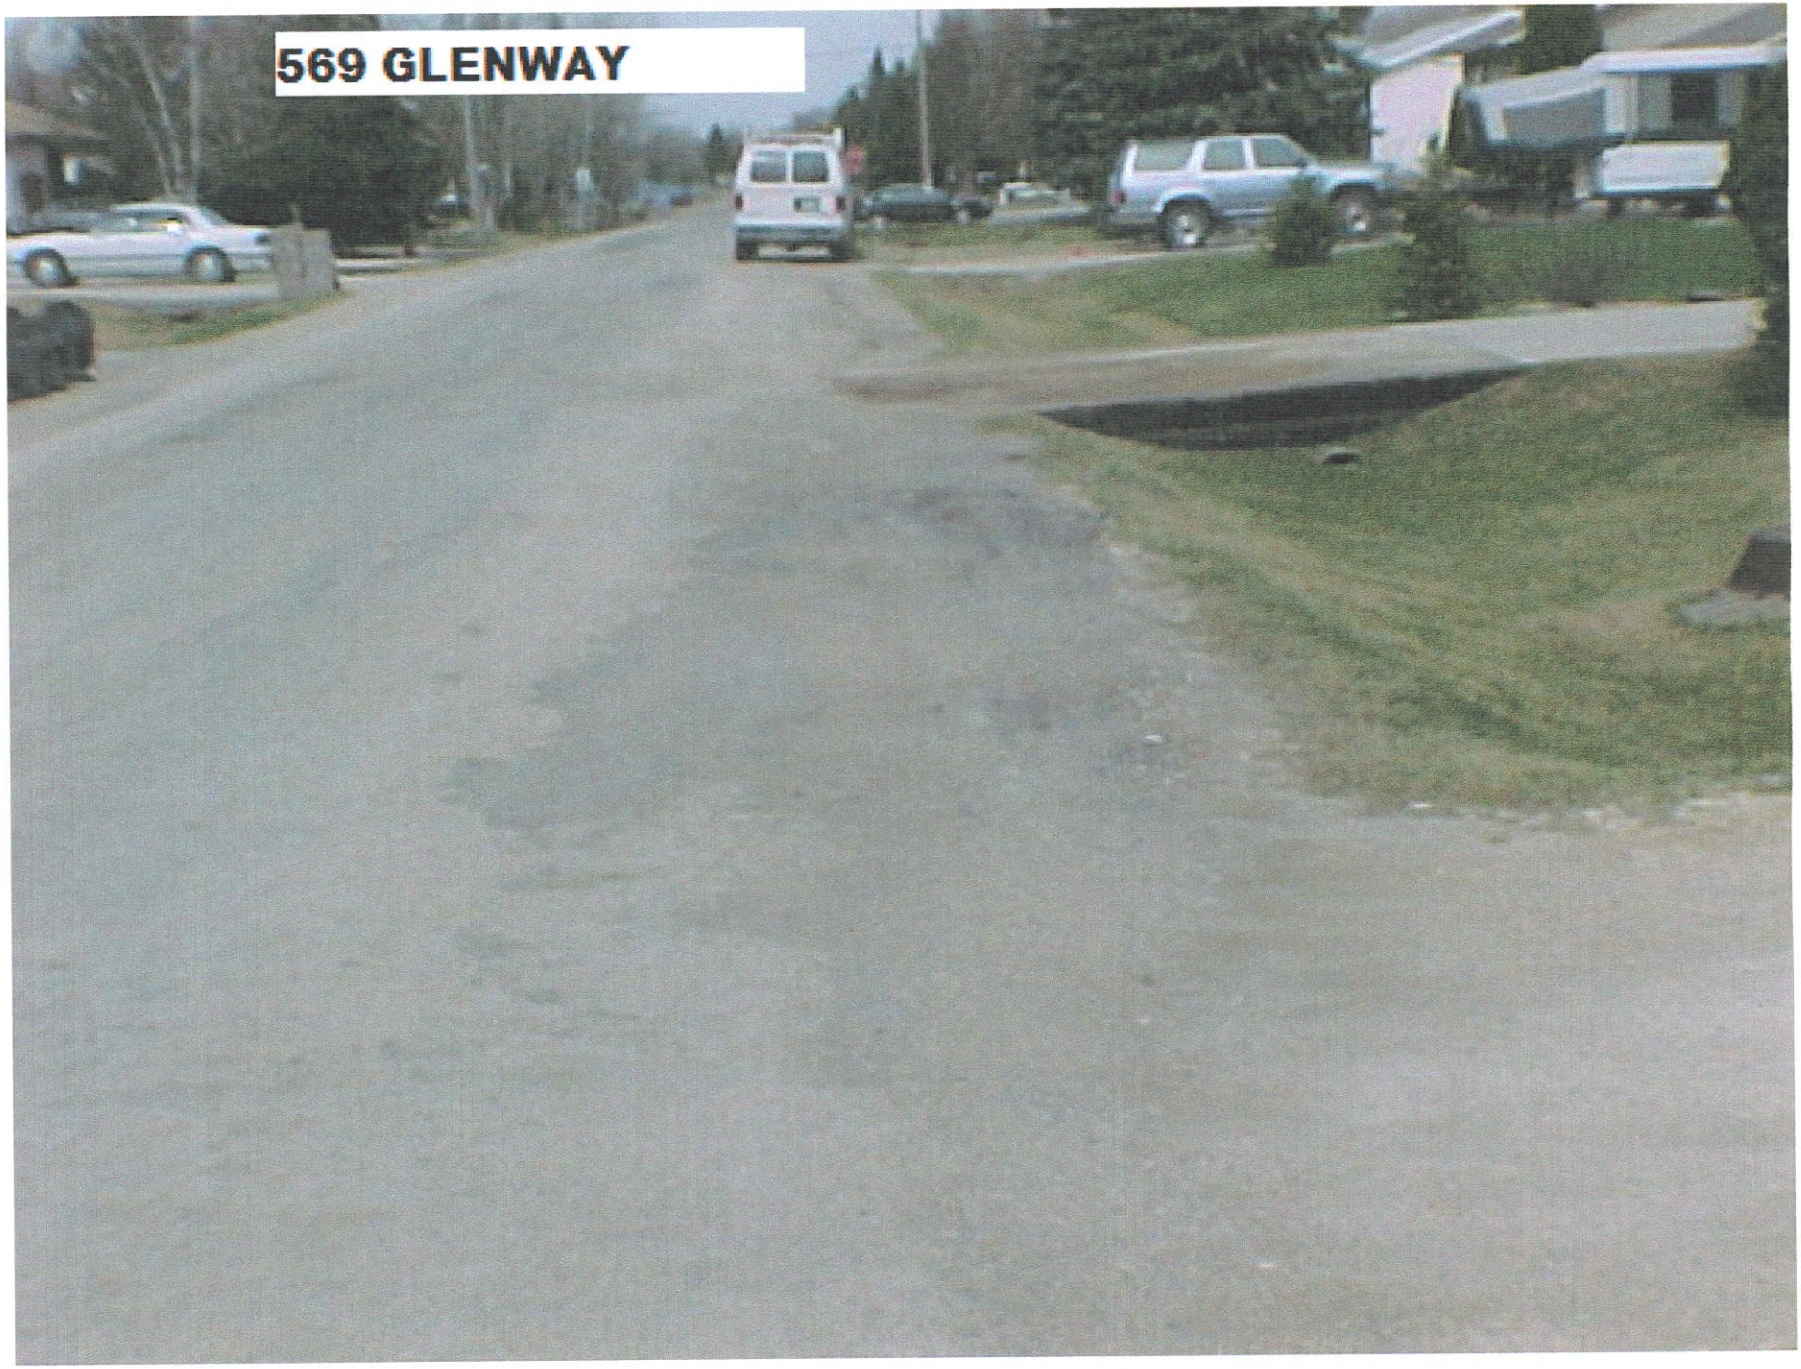

#671 GLENWAY


INTERSECTION OF GLENWAY + MONSON


619 TO 607 GLENWAY


599 GLENWAY


587 GLENWAY


569 GLENWAY

borland

construction inc.

751 Lagimodiere Boulevard
Winnipeg, Manitoba R2J 0T8
Tel. # (204) 255-6444
Fax # (204) 255-5209

RECEIVED MAR 20 2006

March 14, 2006

RM of East St. Paul
3021 Bird's Hill Road
East St. Paul, Manitoba
R2E 1A7

Attn.: Mr. Bruce Schmidt
Dear Sir:

Re: Glenway Ave. Pulverization/Reclamation

As per our discussions, I am enclosing some literature on our Terex RS-650 reclaimer and some budget pricing for possible options on Glenway Ave. from Henderson Hwy. to Raleigh St. (approx. 2 kms) :

pulverization/reclamation of 2 kms x 8.7 metre width,
4" to 6" depth, c/w grading and shaping to desired crossfall and
final rolling and compaction
17,400 m² @ $1.95 ..... $ 33,930.00

Optional
At time of reclamation, inject additional cold mix oil at a rate of 2%
100 tonnes @ $376.00 ..... $ 37,600.00

Note: The reclaimed surface could be left as it, or it could be seal coated, or it could be overlayed with asphaltic pavement.

Feel free to call if you have any questions.

Yours truly

Leonard Wiens
Manager, Paving Division
Borland Construction Inc.